

CLIMATE MASTERS

The ultimate in energy efficient, natural ducted gas heating.



Another quality product by



Frank Seeley AM FAICD Founder and Executive Chairman

Seeley International is Australia's largest and most awarded air conditioning manufacturer with a history spanning more than 40 years.

Renowned for ingenuity and innovation, Seeley International leads the market in the design and manufacture of heating and cooling systems, with award winning brand names including Breezair, Braemar, Climate Wizard, Convair, Coolair and Coolerado.

With factories in Adelaide, South Australia and Albury, New South Wales, when you buy a Seeley International product you can be confident you're investing in a quality, **Australian made** climate control solution.

Seeley International never stops striving to engineer and build the world's most energy efficient heaters and coolers. It is this commitment to excellence that's at the heart of everything we do.

For Breezair, the product range is made in Australia.

- For Braemar, the evaporative and gas heating product ranges are made in Australia.
- The inverter add-on cooling product range is assembled in Australia.
- For Climate Wizard, the product range is made in Australia.
- For Convair, the evaporative product range is made in Australia.
- For Coolair, the product range is made in Australia.
- For Braemar Tudor Romeo, the product range is made in Australia.
- For Coolerado, the product range is made/assembled in the US.





Seeley International is proud to be the National Variety Bash partner supporting kids in need across Australia.





Just a few recent awards... Seeley International is delighted to have been repeatedly recognised for innovation and excellence.

CEO Awards (Executive of the year) 2015 Winner: Innovation and Design Executive Frank Seeley AM FAICD

Impact Awards 2015 Winner: Inaugural Hall of Fame Frank Seeley AM FAICD

CCN Awards 2015 Winner: HVAC&R Leader of the Year Frank Seeley AM FAICD

The Australian Business Awards 2015 Winner: Best New Product Braemar 7 star equivalent* ducted gas heater

Good Design Awards 2015 Winner: Product Design: Hardware and Building category Braemar 7 star equivalent ducted gas heater BRW Most Innovative Companies List 2015 Top 50 Most Innovative Companies Seeley International Pty Ltd

Australian Design Awards 2014 Winner: Good Design[®] Selection MaglQtouch Controller

United Nations Association of Australia World Environment Day Awards 2014 Winner: Swinburne University of Technology Excellence in Sustainable Product Design Award Braemar "Super-Six" ducted gas heating

Melbourne Design Awards 2013 Winner: Product Design: Housing & Building Awards Braemar "Super-Six" ducted gas heating

Family Business Australia Winner: Award for Entrepreneurship 2013 Frank Seeley AM FAICD











Braemar benefits

For more than 50 years Braemar has been providing Australian families with the world's best, most energy efficient cooling and heating products and has cemented its reputation as a trusted and innovative Australian brand.



Uncompromised product quality and reliability



7 year comprehensive warranty**



10 year heat exchanger and burner warranty



50 year history of Australian excellence

Australian made - a wise Australian buys Australian!

Braemar ducted gas heating benefits

Braemar ducted gas heating is the best choice for efficiency and comfort.



Ducted gas heating with high star ratings in every category



Superior performance in colder weather compared with reverse cycle heating



Cheaper to run compared with reverse cycle heating



World's first and only, most energy efficient 7 star equivalent* ducted gas heater



Whole-of-home heating, with flexible zoning options



Low CO₂ emissions





*Star rating equivalent. Based on Australian Gas Association's results calculated in accordance with the testing methodology in AS4556-2011.



Ducted gas heating vs reverse cycle heating


With energy prices rising, ducted gas heating has the edge on reverse cycle when it comes to both efficiency and performance, and even more so now with the world's first 7 star equivalent ducted gas heater from Braemar.

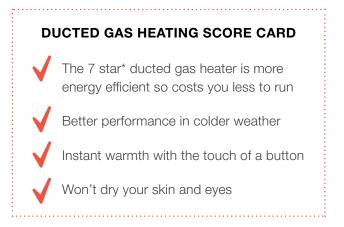

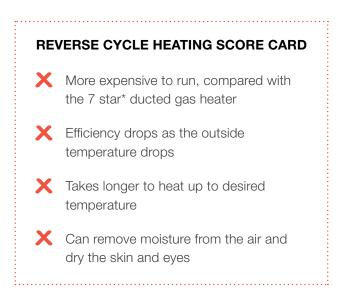

Running cost comparison


Braemar 7 star* ducted gas heating is the cheapest whole of home gas heating in Australia, saving you up to \$612 per year when compared to a ducted reverse cycle heater.^

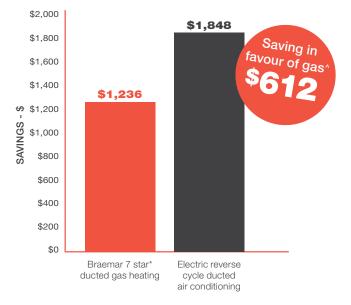

Efficiency comparison

(depending on outdoor temperature)


When it gets really cold outside, reverse cycle systems lose efficiency, while Braemar ducted gas systems keep your home as warm as you want it – no matter how cold it gets outdoors!

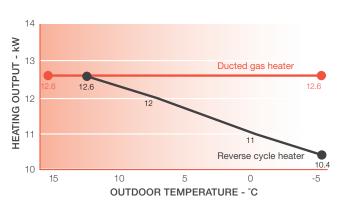

Aseley International's calculation, using data sourced from Sustainability Victoria (2016), adjusted to the Braemar 7 star equivalent ducted gas heater, compared to a standard efficiency electric reverse cycle ducted air conditioning system, for a heated area of 250 m2. Based on 900 hours running per year. Peak electricity tariff – 27.7 c/kWh. Off-peak electricity tariff – 16.6 c/kWh. Marginal natural gas tariff – 1.50 c/MJ for ducted gas heating. Actual costs for your house will depend on the area heated, how long you run the heating for, your thermostat settings, how well insulated the house is, your energy tariffs and your local climate.



Braemar 7 star equivalent the world's first and most energy efficient ducted gas heater

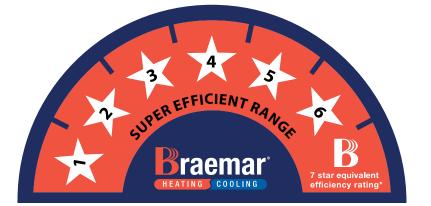



World's first 7 star* ducted gas heater

Most energy efficient on the market

Touch screen MaglQtouch Controller





Braemar ducted gas heating product range

Braemar 7 star equivalent* range



Lowest running costs – by far! Australia's first and only inverter motor for ducted gas heating

- MaglQtouch[®] Controller
- Zoned-heating capable
- Softair™ for greater comfort
- Corrosion-resistant heat exchanger

The world's most energy-efficient conventional ducted gas heater

Braemar 6 star range



STAR

(0

STAR

LQ

Supernova Super-Six (6.8 star equivalent*) Highest star rating equivalent in the 6 star category

- Low running costs
- MaglQtouch[®] Controller
- Zoned-heating capable
- Softair™ for greater comfort
- Corrosion-resistant heat exchanger

Braemar 5 star condensing range

Supernova Super-Five (5.9 star) Highest star rating in the 5 star category • Outstanding efficiency

- Very economical to run
- MaglQtouch[®] Controller
- Zoned-heating capable
- Softair™ for greater comfort
- Corrosion-resistant heat exchanger

Braemar 4 star range

Braemar 3 star range



Supernova Super-Four (4.9 star) Highest star rating in the 4 star category

- High efficiency
- Economical to run

· Value for money

· Easy to operate

Proven reliability

- Zoned-heating capable
- Softair[™] for greater comfort

Supernova Super-Three (3.9 star)

Softair[™] for greater comfort

Highest star rating in the 3 star category

CLIMATE MASTERS

Braemar 5 star non-condensing range

- Small cabinet for easier installation
- Outstanding efficiency
- Very economical to run
- MaglQtouch® Controller
- Zoned-heating capable
- Softair[™] for greater comfort
- Corrosion-resistant heat exchanger
- No drain required

Exclusive product offer

High capacity 3, 4 and 5 star Supernova ranges all compatible with the MaglQtouch[®] Controller.

Braemar 3 star Adaptair™ series



- Replacement for other older heater products
- Value for money
- Easy to operate
- Proven reliability
- Softair[™] for greater comfort


Note: Distribution of 6.8 star and 7 star equivalent models is limited to supporting dealers





STAR

(1)

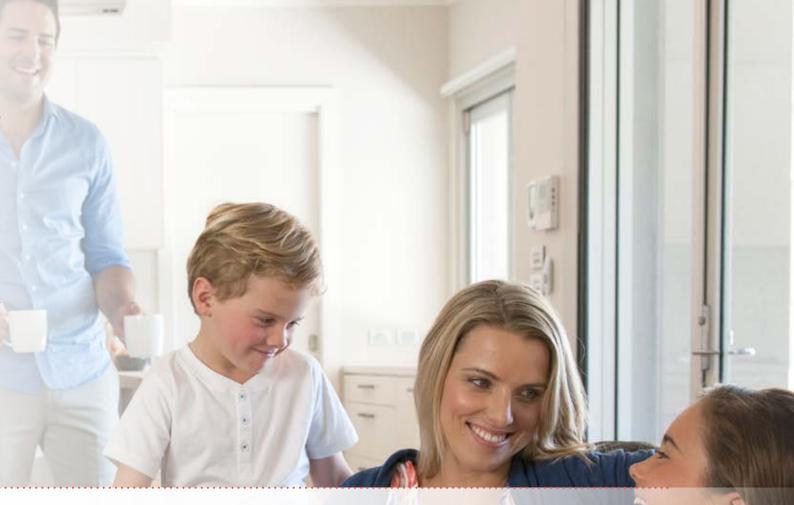

Braemar 5 star Adaptair[™] series



- Replacement for other older heater productsOutstanding efficiency
- Very economical to run
- Very economical to run
 MaglQtouch[®] Controller
 Corrosion resistant heat exchanger
 Easy to operate
 Proven reliability
 Softair™ for greater comfort



At Braemar, we continually strive to enhance and improve our products. Accordingly, some specifications may change without notice. Please check with your Braemar specialist to ensure that specifications of the selected model meet your requirements and expectations.

Save with a higher star rating

More Stars More Savings


We're constantly striving to engineer ingenious products that keep your family warm and save you money.

Installing a Braemar 7 star equivalent ducted gas heater instead of a 3 star ducted gas heater will save approximately **\$577** per year in running costs![†]

STAR RATING EXPLAINED

In Australia, an Energy Rating Labelling scheme assists customers in selecting more energy efficient appliances. The higher the number of stars on the rating label, the more energy efficient the appliance, meaning greater annual savings on your running costs.

On average an increase of one star means an average usage saving of approximately 10 percent.

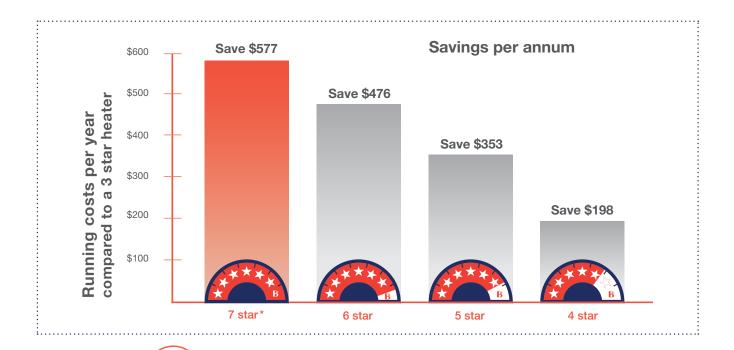

Over a five year period you could **save up to \$2,885** on your heating costs with 7 star* ducted gas heating.

Achieve even higher savings by adding zone control to your heating system.

+Data is based on: Gas price = 1.6 c/MJ • House Size - 240 m2 x 2.4 m ceiling height • Operation hours per year • 600 hrs (100 days at 6 hrs per day) - based on AS4556-2011

House Heat load – 0.2 MJ/h/m3 – based on AS4556-2011 • Annual Energy Consumption (AEC) for different star rated heaters based on AS4556-2011 • 3.0, 4.0, 5.0, 6.0, 6.8 and 7 star equivalent rated ducted gas heating systems. Note: These figures may vary for individual situations due to variation in factors such as gas price, house size and insulation, heater usage patterns, the area heated, how long you run the heating for, your thermostat settings, how well insulated the house is, your local climate etc.



Twelve market leading Braemar Supernova products!

Supernova Series



No an

No competitive product can match any of the Braemar Supernova products for heating capacity and ultra-efficiency.



Unbeatable value and performance this winter!

The highest star rating model in every category!

THE SUPERNOVA RANGE INCLUDES:

Super-Three 3.9 star

Super-Four 4.9 star Super-Five 5.9 star

Super-Six 6.8 star equivalent*

7 Star equivalent*



Exclusive product offer

Six NEW high capacity 3, 4 and 5 star Supernova models all compatible with the MaglQtouch Controller.

Touch screen MaglQtouch Controller

The most energy-efficient ducted gas heaters available in Australia



Available in higher capacities up to 32kW





Why choose a Climate Masters of Seeley International specialist?



CLIMATE

Members[^] of Climate Masters of Seelev International are heating and cooling experts, and provide a level of service you won't get anywhere else.

Unsurpassed professionalism and expertise

A comprehensive assessment of your heating needs and a solution that is exactly right for you, backed up with a product recommendation from CompuComfort™.

The intelligent CompuComfort design program:

- uses a unique web application to accurately profile your home's key architectural aspects;
- considers a variety of factors such as solar and thermal gains, and insulation values;
- in so doing it ensures the optimum system is specified for your unique requirements.

This is followed by a detailed written solution and cost quote, so you have all the information you need to guarantee that you and your family are superbly comfortable, all year round.

Unrivalled quality service

Quick, professional and outstanding service, with absolutely no mess left behind, backed by our seven year workmanship warranty. All members take health and safety standards very seriously and only employ qualified tradespeople.

Aftercare that really delivers

Once your cooling system is operating as designed, you get as much of our time as you need to show you how to use it and how to get the most out of it, and we're here to help whenever you need us.



Reliability

You receive the benefit of our impeccable track record, which speaks for itself. That's the only way selected dealers can be Climate Masters of Seeley International members!



Exclusive product offer

This winter, the smart, sophisticated and intuitive touch screen MaglQtouch Controller, is available with all ducted gas heating (optional upgrade for TQ3 and TQD3 models)*.

^Members are independent retailers. *Night quiet mode and zoning is not available, and fan speed is not user-adjustable on TQ3 and TQD3 models



Features and benefits

Inverter motor

- Australia's **first and only** inverter motor, available on the 7 star* model only
- Inverter technology ensures uninterrupted comfort and **savings** in running costs

Softair[™] fan system

- Exclusive to Braemar
- Delivers continuous warm air and ensures no cold drafts

Electronic ignition

• Eliminates the need for a pilot light

AUSTRALIAN

Ensures dependable ignition
Monitors all heater, flame sensor and safety functions

Combustion inducer fan

• Ultra safe, whisper quiet operation

REH

e

Safely expels all combustion gases outside

0

Eco-star Tri-Action[™] heat exchanger

- Standard on TQ5, TQM6 and TQS7 series ducted gas heaters
- Maximum heat transfer in minimum space

Multi level safety controls

- Standard on all of our ducted gas heating systems
- Numerous layers of safety points to protect your family and your home

Quiet heating

- Designed to work as quietly as possible
- Distributes warm air via ducts quickly, effectively and discreetly

Flexible installation

- Unit can be safely installed in the roof, under the floor or outside the house[†]
- Ducts can be installed in the ceiling or under the floor
- Two-piece configuration means easy installation through the man hole

[†]Braemar TQS7 is suitable for internal installations only.



- Maximises efficiency
- Reduces need for maintenance



Heater output modulation

Braemar's clever combination of step-modulating gas control, and micro-processor controlled burner cycling* means the heater output can reduce to as low as 6% of its maximum, when heating single small areas of the home (in zoned systems, or when the outside temperature increases)[^].

 available on Braemar TQ4/5, TQM5/6 and TQS3/4/5/6/7 series ducted gas heaters, but is not available on other models.
 subject to correct heater sizing and duct/zone configuration.

IMPORTANT

Remember to always use qualified, licensed installers who have been trained to install Braemar products. While Seeley International stands by its product quality, a poorly installed product may not operate properly and can even be dangerous. So be sure to buy your product from a reputable dealer (visit braemar.com.au or call 1300 360 815 to find a dealer) and make sure your installer is fully qualified and trained.



1 11

Whole-of-home heating

with flexible zoning options

Zoning your house

with MaglQtouch Controller and zone control

EASY AND ECONOMICAL

 \checkmark


Complete control over individual comfort needs

Flexibility to heat only parts of the house in use

Customisable 7 day, four time period programming

Save up to an extra 60% on running costs

by adding zone control to your heating system.⁺

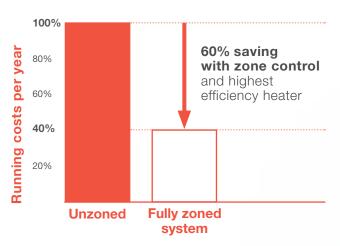

Controller options



Manual Controller

Standard with 3 star ducted gas heating

+Actual savings achieved will depend on the number of zones and controls installed, actual zone usage pattern, temperature settings, outside temperature, house size and room layout, house insulation, number of outlets, zone system design. Zoning savings are based on: • A range of assumed zone configurations, usage profiles and zone set-temperatures, with energy consumption reduced due to not heating the whole house all of the time; • Individual zone temperature control (a single MaglQtouch Controller in combination with air temperature sensors, or multiple MaglQtouch Controllers). Actual savings from zoning depend on: • Vour individual zoning configuration • The way you use your zones • Zone set temperatures and on/off times • House size, layout and insulation • Outside temperature. Please note: Zoning is not available with 3 star heaters. *Extra charge applies. ^TQ3 and TQD3 models: night quiet mode and zoning is not available, and fan speed is not user-adjustable.



. . . .

Room-level zoning

Enjoy having control over individual comfort levels throughout your home by setting desired temperatures in up to 10 different zones.

Install the MagIQtouch Controller in the central living area and air sensors in each of the zones:

- Control the temperature in each zone independently;
- Turn the various zones on or off at your preferred times independently.

Upgrade the air sensors to MaglQtouch Controllers:

- Control the heating in each zone from that zone;
- Set customisable programming for each of the zones from your MaglQtouch Controller.

Centralised zoning

Comfort made easy with centralised zoning:

- Set your ideal temperature in the common zone
- Create additional zones, all controlled from a single centralised MaglQtouch Controller
- Turn heating on or off in each of the zones so you're not heating areas you aren't using and save!

Your experienced Seeley International dealer will work with you to design the zoning system that best suits your needs and your family's lifestyle.

Set the study and sitting room to 19°C

Set the lounge and formal dining to 21°C

Set the kitchen and meals to 18°C

Set the bedrooms to 18°C



Innovative MAGI@TOUCH[®] Controller

Touch screen technology

With the MaglQtouch Controller, operating your Braemar ducted gas heater is easy. Smart, sophisticated and intuitive, its discreet, modern design will blend seamlessly into the décor of your home.

As easy to use as your familiar touch screens, this controller's intuitive user navigation system makes operating simple. Keeping your home and your family warm in winter is easy and economical with the MaglQtouch Controller and your Braemar ducted gas heater.

For year round comfort, operate your Braemar refrigerated add-on or evaporative cooling, from a single controller.

Personalised heating

If you want to "set and forget" a seven-day program that suits your lifestyle, then Braemar's Program mode is for you.

Program mode divides each day into four time periods. You decide when each of these periods begins and what you want your system to be doing.

But you can have flexibility as well. If you leave or arrive home early, you can easily skip forward to the next period. The program will take over again once the next time period begins.

Night quiet mode

When turned on, the Night quiet mode automatically reduces fan speed during the night for whisper quietness.*

Customisable

There is no need to display advanced functionality if it isn't required. You have the choice to view simple or advanced displays.

In simple display you can set your mode and temperature and let the MaglQtouch Controller do the rest! Or, if you would like access to more advanced features, by touching 'More' you can select manual temperature mode, manual fan speed mode, or program mode and access other settings.



MAGI@TOUCH

00

MONDAY

TEMP

SPE

20 APRIL 2016

Optional extra

Allows you to mount your MaglQtouch Controller in the most convenient place in your home, as the MaglQtouch Air Sensor will then take over temperature control from the MaglQtouch Controller. This can then be located in the best place in the house to ensure ultimate heating comfort for everyone.

*TQ3 and TQD3 models: night quiet mode and zoning is not available, and fan speed is not user-adjustable.







Zone control*

This feature allows:

- Dampers to be added to the system to independently control the climate of each room either with the master MaglQtouch wall controller or by additional MaglQtouch controllers or Air Sensors;
- You to switch off zones that are not in use, thus reducing your running costs.

Gas rate

Depending on the heater model installed the Gas rate function gives you the opportunity to control the maximum gas rate when energy consumption is important.

Program mode

The set and forget seven day, four time period programming is customisable to suit your lifestyle (including a temporary over-ride function).



Date and time

Displays appear on all operation screens.



Child access lock

Select a pin code to control access to your controller.



About appliance

Displays information about your appliance including serial number, model number, and software version.

Adjustable working temperature range

Customise the temperature range displayed on the slider.



Status information

When this option is turned on, a temporary information display window becomes accessible on all Manual and Program screens to aid in troubleshooting.



Screen brightness adjustment

Adjust the brightness of the screen when in standby mode, to suit your home and preference.



Inbuilt diagnostics

If a fault is detected in the system, a fault message dialogue box will appear with information about the fault and some options to resolve the issue.



"We love how quickly our Braemar ducted gas heating warms the whole house and also that we can control the zones." Maria

> "I like the fact that you can zone the heat to where you are and not heat rooms that are not being used." Angela






Care about the environment?

Compare the CO₂ emissions savings across our range to find the ducted gas heating system that best suits your family.

CO2 emissions savings per year (tonnes)[‡]

with higher than a 3 star rating Braemar ducted gas heatert



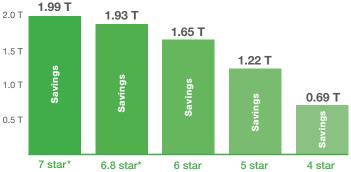

Renovating or upgrading?

The Adaptair series is specially designed to replace some older heater models and brands.

The Adaptair 3 and 5 star heater dimensions fit perfectly into the space used by some older heaters, making installation even quicker and easier.

- Pre-fitted with brackets to suit existing supply / return air plenum boxes.
- Heater is supplied with a gas inlet pipe to match the existing gas supply location.

Short on space?

Our 5 star non-condensing series has a cabinet that is 30% smaller than other five star heaters.

Not only does this save on space, it also means the heater is easier, and therefore cheaper, to install.

Still boasting a 5 star rating without the need for a condensation drain, the size of the cabinet is reduced, and so is your bill.

‡Seeley International's calculation, CO² emissions data is based on Australian Government Department of Climate Change and Energy Efficiency – National Greenhouse Accounts Factors July 2012. †Data is based on: • Gas price = 1.6 c/MJ • House Size – 240 m2 x 2.4 m ceiling height • Operation hours per year • 600 hrs (100 days at 6 hrs per day) – based on AS4556-2011. House Heat load – 0.2 MJ/h/m³ – based on AS4556-2011 • Annual Energy Consumption (AEC) for different star rated heaters based on AS4556-2011 • 3.0, 4.0, 5.0, 6.0, 6.8 and 7 star equivalent rated ducted gas heating systems. Note: These figures may vary for individual situations due to variation in factors such as gas price, house size and insulation, heater usage patterns etc. ^CO2 emissions from small car based on: Table 15, "Carbon Emissions from New Australian Vehicles 2011 Information Paper", National Transport Commission Australia. Calculation assumes an annual travel distance of 7900 km/yr.



| 17

Year round comfort with cooling options

to complement your Braemar heating system

ADD-ON COOLING

One ducting system for gas heating and refrigerated cooling, one controller

Zoning for individual areas

Inverter models (Invertair[™] series) and fixed speed models (SACC series) available


EVAPORATIVE COOLING



Fresh, healthy air, whole-of-home cooling system



Incredibly low running costs



Add-on cooling systems

.....

Now you can enjoy year round comfort with cooling systems specifically designed to complement your new or existing[†] Braemar gas heating system.



High energy efficiency and

quiet operation with Invertair series - Australia's first and only TRUE inverter add-on cooling.



Largest cooling capacity in the nation

Enjoy exceptional comfort without the worry of high energy costs with high quality SACC fixed speed series.



Designed to fit your ducted gas heating system

Refrigerated air-conditioning using the same ductwork and grilles as your Braemar ducted gas heating system.



Easy installation and operation

No need for new ductwork or grilles means simple installation and savings for you.

/			
		⊻	
4			J
~	_	~	

Achieve year-round comfort

Specifically designed to complement your new or existing[†] Braemar ducted gas heating system.

Compact and economical to run

Can be installed at the same time as your heating system, or added later.

One heater, one cooler, one control



- Advanced touch screen technology
- Enjoy different temperatures in up to 10 zones#
- One touch controller for Braemar heating and cooling

†Applicable to installations where airflow requirements and duct design are suitable. Not all models of Braemar ducted gas heaters are suitable for add-on cooling, so please check with your dealer. #Note: zoning not available with 3 star heaters.





Evaporative cooling systems

Evaporative air-conditioning boasts a long list of benefits to your family and to the environment. With specially installed ducts for cool air, Braemar evaporative cooling systems can complement your Braemar ducted gas heating system and can be operated from the same convenient MaglQtouch Controller.



Fresh, healthy air

Evaporative cooling is a totally natural process filling your home with 100% fresh air – ideal choice for allergy and asthma sufferers[†].



High energy efficiency

Evaporative cooling is the most energy and cost efficient way to cool your whole home.



Low running costs

Unlike refrigerated systems, evaporative cooling consumes less power, hence costs you less to run.



Whisper-quiet cooling

The advanced aerodynamic design of the fan blades, coupled with the state of the art Stealth[®] fan, produce whisper-quiet, cool, constant, and welcoming breeze.



Whole of home cooling

Cool your entire home without zoning and enjoy all parts of your indoor and outdoor living.



Powerful cooling

Braemar cooler is designed to deliver maximum cooling performance with minimum energy and water consumption, even during the hottest heatwaves.



Built to out-last

Permatuf[®] polymer cabinet is designed to withstand the harshest extremes of climate, year after year.



Superb engineering

Braemar's clever water distribution system, incredibly smart automatic drain valve and its AutoWinterseal[™] features, together reduce the need for seasonal maintenance[^].




So easy to use

Set the comfort level you want on the one controller and the Braemar unit does the rest. Available with the new MaglQtouch Controller - with advanced touch screen technology.



The right choice for the environment

Evaporative coolers consume only a small proportion of the energy consumed by ducted refrigerated systems.



Aseasonal maintenance is the time consuming routine required by some other units. Ask your dealer for a complete rundown. Seasonal maintenance does not replace regular maintenance of the unit as required for peak performance.

| 19

Braemar specifications

Ducted gas heating



Markin Same Multi Value					Gas rate	Airflow	Output	Wall control		Length	.ength Width		Duct dia	
Super-Six 1058X2 Super-Six 1058X2<		Model	Series name	Stars				Standard	Option					Gas type
Super-Six 1058X2 Super-Six 1058X2<	7 star equivalent*	TQS730 [#]	Ecostar	7.0*	100	700	26.6	MaglQtouch		1165	510	660	350	NG
Super-Ski (10.502.2) Super-Nov 6.8* 0.8* 122 0.70 0.1.2 Mugdituch 105 0.01 600 400 Vice Super-Ski (10.502.2) Superman 6.8* 6.8 640 2.2.5 Mugdituch 1150 355 660 300 NG T0M 0715 Exectar 6.3* 6.8 70 570 17.9 Mugdituch 1150 355 660 300 NG T0M 022 Exectar 6.3* 88 640 2.2.5 Mugdituch 1150 355 660 300 NG T0M 632 Exectar 6.3* 112 355 31.2 Mugdituch 1165 510 660 300 NG T0M 632 Exectar 6.3* 1122 1070 31.2 Mugdituch 1165 510 660 300 NG Super-Five T05322 Supermova 5.9 122 1070 31.2 Mugdituch 1160 385 660<		Super-Six TQS632	Supernova	6.8*	122	935	31.2	MaglQtouch		1165	510	660	350	NG
Image: Second Part 1 East Part 1 Second Part 1 Sec	ž.,	Super-Six TQS6X32 [†]	Supernova	6.8*	122	1070	31.2	MaglQtouch		1165	510	660	400	CAD
Image: Second Part 1 East Part 1 Second Part 1 Sec	/alen	Super-Six TQS623	Supernova	6.8*	88	640	23.5	MaglQtouch		1150	385	660	300	NG
Image: Second Part 1 East Part 1 Second Part 1 Sec	equi	Super-Six TQS6X23 [†]	Supernova	6.8*	88	755	23.5	MaglQtouch		1150	385	660	350	NG
Image: Second Part 1 East Part 1 Second Part 1 Sec	star	TQM618	Ecostar	6.3*	70	500	17.9	MaglQtouch		1150	385	660	300	NG
Image: Second Part 1 East Part 1 Second Part 1 Sec	1d 6.8	TQM623	Ecostar	6.3*	88	640	22.5	MaglQtouch		1150	385	660	300	NG
TUMAX21 Exatir 6.3 122 1070 31.2 MagDituch 1165 510 60 400 NEProam Super-Five T0SX22 Super-Five T0SX23 Super-Five T0SX24 Super-Five T0SX24<		том6х23†	Ecostar	6.3*	88	755	22.5	MaglQtouch		1150	385	660	350	NG/Propane
Super-Five TQSX27 Supermova 5.9 122 935 31.2 Mag(louch Mag(louch Tif6 510 660 550 N0 Super-Five TQSX27 Supermova 5.9 8.8 755 2.2.5 Mag(louch Tif65 510 660 300 N0 Super-Five TQSX27 Supermova 5.9 8.8 755 2.2.5 Mag(louch Tif6 510 660 300 N6 TQ516 Ecostar 5.6 60 500 16.0 Mag(louch 1150 385 660 300 N6 TQ523 Ecostar 5.6 88 7.5 2.0 Mag(louch 1150 385 660 300 N6 TQ523 Ecostar 5.6 122 9.55 32.0 Mag(louch 1150 385 660 300 N6 TQ532 Ecostar 5.2 70 4/5 15.9 Mag(louch 770 385 660 300 N6 <		TQM632	Ecostar	6.3*	122	935	31.2	MaglQtouch		1165	510	660	350	NG
Super-Five TQSSX27 Supernova 5.9 122 1070 31.2 Hagitback Image: Discontine to the second se		том6х32†	Ecostar	6.3*	122	1070	31.2	MaglQtouch		1165	510	660	400	NG/Propane
Sper-Five T0SS23 Supernova 5.9 8.8 640 2.2.5 MagDdouch Market 1150 3.8.5 660 300 NG T0516 Ecostar 5.6 8.0 500 16.0 MagDdouch 1150 3.8.5 660 300 NG T0516 Ecostar 5.6 8.8 6'0 2.0.0 MagDdouch 1150 3.8.5 660 300 NG T0523 Ecostar 5.6 8.8 6'12 3.0.5 MagDdouch 1150 3.8.5 660 300 NG T0532 Ecostar 5.6 122 9.5 2.0.0 MagDdouch 1155 510 660 300 NG T0532 Ecostar 5.2 70 4'5 15.9 MagDdouch 1165 510 660 300 NG T0M5201 Ecostar 5.2 122 1050 27.8 MagDdouch 880 510 600 300 NG <		Super-Five TQS532	Supernova	5.9	122	935	31.2	MaglQtouch		1165	510	660	350	NG
Super-Five T05523		Super-Five TQS5X32 [†]	Supernova	5.9	122	1070	31.2	MaglQtouch	CLIMATE	1165	510	660	400	NG
Mag I Clouch T15X23T Ecostar 5.6 88 77.5 23.0 Mag I Clouch 1150 385 660 350 M6 T05X23 Ecostar 5.6 122 935 32.0 Mag I Clouch 1165 510 660 350 M6 T05X32T Ecostar 5.6 122 1170 32.0 Mag I Clouch 710 385 660 300 M6 T0M520 Ecostar 5.2 70 4/5 15.9 Mag I Clouch 770 385 660 300 M6 T0M520 Ecostar 5.2 88 690 20.0 Mag I Clouch 770 385 660 350 M6 T0M530 Ecostar 5.2 122 1050 27.8 Mag I Clouch 880 510 660 400 NGPropane T0M530T Adaptair 5.2 122 1050 27.8 Mag I Clouch 880 510 660 350 NA		Super-Five TQS523	Supernova	5.9	88	640	22.5	MaglQtouch	SEELEY	1150	385	660	300	NG
TGSX23T Ecostar 5.6 88 77.5 23.0 MaglDouch 1160 385 660 350 N6 TGSX2 Ecostar 5.6 122 9.35 32.0 MaglDouch 1165 510 660 350 N6 TGSX2 Ecostar 5.6 122 10.70 32.0 MaglDouch 710 385 660 350 N6 TOM516 Ecostar 5.2 70 4/5 15.9 MaglDouch 770 385 660 350 N6Propane TOM520 Ecostar 5.2 88 695 20.0 MaglDouch 770 385 660 350 N6Propane TOM530 Ecostar 5.2 122 1050 27.8 MaglDouch 770 385 635 NA N6 TOM530 ⁺ Ecostar 5.2 122 1050 27.8 MaglDouch 770 385 635 NA N6 TOM530 ⁺	5 stal	Super-Five TQS5X23 [†]	Supernova	5.9	88	755	22.5	MaglQtouch		1150	385	660	350	NG
TGSX23T Ecostar 5.6 88 775 23.0 MaglDtouch 1150 385 660 350 M6 TGSX2 Ecostar 5.6 122 9.55 32.0 MaglDtouch 1165 510 660 350 M6 TGSX2 Ecostar 5.6 122 1070 32.0 MaglDtouch 1165 510 660 350 M6 TGMS20 Ecostar 5.2 70 4/5 15.9 MaglDtouch 770 385 660 350 M6 TGMS20 Ecostar 5.2 88 6'90 20.0 MaglDtouch 770 385 660 350 M6 TGMS20 [†] Ecostar 5.2 122 1050 27.8 MaglDtouch 770 385 635 NA M6 TGMS30 [†] Ecostar 5.2 122 1050 27.8 MaglDtouch 770 385 635 NA M6 TGMS30 [*]		TQ516	Ecostar	5.6	60	500	16.0	MaglQtouch		1150	385	660	300	NG
TGX23T Ecostar 5.6 88 7.75 23.0 MaglDouch 1150 385 660 350 M6 TGS32 Ecostar 5.6 122 9.55 32.0 MaglDouch 1165 510 660 350 M6 TGS32 Ecostar 5.6 122 10.70 32.0 MaglDouch 1165 510 660 350 M6 TGM52D Ecostar 5.2 70 4/5 15.9 MaglDouch 770 385 660 350 M6 TGM52D Ecostar 5.2 88 650 20.0 MaglDouch 770 385 660 350 NGPropane TGM52D Ecostar 5.2 122 1050 27.8 MaglDouch 770 385 635 NA NG TGM53D Ecostar 5.2 122 1050 27.8 MaglDouch 770 385 635 NA NG TGM53D Su	Uden 🗸	TQ523	Ecostar	5.6	88	640	23.0	MaglQtouch		1150	385	660	300	NG
International problem TabX32 [†] Ecostar 5.6 122 1070 32.0 Magldbuch 1165 510 660 400 NG TUM516 Ecostar 5.2 70 475 15.9 Magldbuch 770 385 660 300 NG TUM520 Ecostar 5.2 88 695 20.0 Magldbuch 770 385 660 300 NG TUM520 Ecostar 5.2 122 960 27.8 Magldbuch 770 385 660 300 NG TUM530 Ecostar 5.2 122 1050 27.8 Magldbuch 770 385 660 300 NG TUM536 [†] Adaptair 5.2 122 1050 27.8 Magldbuch 770 385 685 NA NG TUM0536 [†] Adaptair 5.2 122 1050 27.8 Magldbuch 770 385 680 300 NG N	8	TQ5X23 [†]	Ecostar	5.6	88	755	23.0	MaglQtouch		1150	385	660	350	NG
Image: Point T04516 Eccetar 5.2 70 4.75 15.9 Magl(buch 770 385 660 300 NG T0M516 Eccetar 5.2 88 690 20.0 Magl(buch 770 385 660 300 NG T0M520 Eccetar 5.2 88 695 20.0 Magl(buch 770 385 660 300 NG T0M530 Eccetar 5.2 122 960 27.8 Magl(buch 880 510 660 300 NG T0M530 ⁺ Eccetar 5.2 122 1650 27.8 Magl(buch 770 385 635 NA NG T0M550 ⁺ Adaptair 5.2 70 440 15.9 Magl(buch 770 385 635 NA NG T0M0520 ⁺ Adaptair 5.2 122 880 27.8 Magl(buch 770 385 635 NA NG Super-Four T054		TQ532	Ecostar	5.6	122	935	32.0	MaglQtouch		1165	510	660	350	NG
Image: Point of the p		TQ5X32 [†]	Ecostar	5.6	122	1070	32.0	MaglQtouch		1165	510	660	400	NG
Image: second		TQM516	Ecostar	5.2	70	4/5	15.9	MaglQtouch		770	385	660	300	NG
Image: state	Ising	TQM520	Ecostar	5.2	88	630	20.0	MaglQtouch		770	385	660	300	NG
Image: constant in the	nder star	том5х20†	Ecostar	5.2	88	695	20.0	MaglQtouch		770	385	660	350	NG/Propane
Image: constant in the	5	TQM530	Ecostar	5.2	122	960	27.8	MaglQtouch		880	510	660	350	NG
TQMD520 [‡] Adaptair 5.2 88 490 20.0 MaglQbuch 770 385 635 NA NG TQMD520 [±] Adaptair 5.2 122 880 27.8 MaglQbuch 880 510 650 NA NG Super-Four TQS430 Supernova 4.9 122 960 27.8 MaglQbuch 880 510 660 350 NG Super-Four TQS4X30 [†] Supernova 4.9 122 1050 27.8 MaglQbuch 880 510 660 350 NG Super-Four TQS4X20 [†] Supernova 4.9 88 630 20.0 MaglQbuch 770 385 660 300 NG TQ415 Ecostar 4.7 60 475 14.0 MaglQbuch 770 385 660 300 NG TQ420 Ecostar 4.7 80 635 18.0 MaglQbuch 770 385 660 350 NG <t< td=""><td>ž</td><td>том5хзо†</td><td>Ecostar</td><td>5.2</td><td>122</td><td>1050</td><td>27.8</td><td>MaglQtouch</td><td></td><td>880</td><td>510</td><td>660</td><td>400</td><td>NG/Propane</td></t<>	ž	том5хзо†	Ecostar	5.2	122	1050	27.8	MaglQtouch		880	510	660	400	NG/Propane
Super-Four TQS430 Supernova 4.9 122 960 27.8 MaglQtouch Event 880 510 660 350 NG Super-Four TQS4X30 [†] Supernova 4.9 122 1050 27.8 MaglQtouch Event 880 510 660 400 NG Super-Four TQS420 Supernova 4.9 88 630 20.0 MaglQtouch Full 770 385 660 300 NG Super-Four TQS4X20 [†] Supernova 4.9 88 695 20.0 MaglQtouch 770 385 660 300 NG TQ415 Ecostar 4.7 60 475 14.0 MaglQtouch 770 385 660 300 NG TQ420 Ecostar 4.7 80 695 18.0 MaglQtouch 770 385 660 350 NG TQ4X20 [†] Ecostar 4.7 100 755 23.0 MaglQtouch 770 385<	و ۲	TQMD516 [‡]	Adaptair	5.2	70	440	15.9	MaglQtouch		770	385	635	NA	NG
Super-Four TQS430 Supernova 4.9 122 960 27.8 Magl(touch Magl(touch 880 510 660 350 NG Super-Four TQS4X30 [†] Supernova 4.9 122 1050 27.8 Magl(touch Furt TQS420 880 510 660 400 NG Super-Four TQS420 Supernova 4.9 88 630 20.0 Magl(touch 770 385 660 300 NG TQ415 Ecostar 4.7 60 475 14.0 Magl(touch 770 385 660 300 NG TQ415 Ecostar 4.7 80 695 18.0 Magl(touch 770 385 660 300 NG TQ420 Ecostar 4.7 80 695 18.0 Magl(touch 770 385 660 350 NG TQ4x20 [†] Ecostar 4.7 100 755 23.0 Magl(touch 770 385 660 350	lensi star /nflo/	TQMD520 [‡]	Adaptair	5.2	88	490	20.0	MaglQtouch		770	385	635	NA	NG
Super-Four TQS430 Supernova 4.9 122 960 27.8 Magl(touch Magl(touch 880 510 660 350 NG Super-Four TQS4X30 [†] Supernova 4.9 122 1050 27.8 Magl(touch Furt TQS420 880 510 660 400 NG Super-Four TQS420 Supernova 4.9 88 630 20.0 Magl(touch 770 385 660 300 NG TQ415 Ecostar 4.7 60 475 14.0 Magl(touch 770 385 660 300 NG TQ415 Ecostar 4.7 80 695 18.0 Magl(touch 770 385 660 300 NG TQ420 Ecostar 4.7 80 695 18.0 Magl(touch 770 385 660 350 NG TQ4x20 [†] Ecostar 4.7 100 755 23.0 Magl(touch 770 385 660 350	cond 5 dow	TQMD530 [^]	Adaptair	5.2	122	880	27.8	MaglQtouch		880	510	650	NA	NG
Super-Four TQS420 Supernova 4.9 88 630 20.0 MaglQtouch TO 385 660 300 NG Super-Four TQS420 Supernova 4.9 88 695 20.0 MaglQtouch 770 385 660 300 NG TQ415 Ecostar 4.7 60 475 14.0 MaglQtouch 770 385 660 300 NG TQ415 Ecostar 4.7 80 630 18.0 MaglQtouch 770 385 660 300 NG TQ420 Ecostar 4.7 80 630 18.0 MaglQtouch 770 385 660 300 NG TQ420 Ecostar 4.7 80 695 18.0 MaglQtouch 770 385 660 350 NG TQ425 Ecostar 4.7 100 755 23.0 MaglQtouch 770 385 660 350 NG TQ4X20 [†]		Super-Four TQS430	Supernova	4.9	122	960	27.8	MaglQtouch		880	510	660	350	NG
Super-Four TQS420 Supernova 4.9 88 630 20.0 MaglQtouch T70 385 660 300 NG Super-Four TQS4X20 [†] Supernova 4.9 88 695 20.0 MaglQtouch T70 385 660 300 NG TQ415 Ecostar 4.7 60 475 14.0 MaglQtouch 770 385 660 300 NG TQ415 Ecostar 4.7 60 475 14.0 MaglQtouch 770 385 660 300 NG TQ420 Ecostar 4.7 80 630 18.0 MaglQtouch 770 385 660 300 NG TQ420 [†] Ecostar 4.7 80 695 18.0 MaglQtouch 770 385 660 350 NG TQ425 [†] Ecostar 4.7 100 755 23.0 MaglQtouch 770 385 660 350 NG TQ4		Super-Four TQS4X30 [†]	Supernova	4.9	122	1050	27.8	MaglQtouch	CLIMATE	880	510	660	400	5 (
Super-Four TQS4X20 [†] Supernova 4.9 88 695 20.0 MaglQtouch 770 385 660 350 NG TQ415 Ecostar 4.7 60 475 14.0 MaglQtouch 770 385 660 300 NG TQ420 Ecostar 4.7 80 630 18.0 MaglQtouch 770 385 660 300 NG TQ420 Ecostar 4.7 80 695 18.0 MaglQtouch 770 385 660 350 NG TQ4x20 [†] Ecostar 4.7 100 755 23.0 MaglQtouch 770 385 660 350 NG TQ4x25 [†] Ecostar 4.7 100 810 23.0 MaglQtouch 770 385 660 350 NG TQ4x25 [†] Ecostar 4.7 100 810 23.0 MaglQtouch 770 385 660 350 NG TQ4x30 [†]		Super-Four TQS420	Supernova	4.9	88	630	20.0			770	385	660	300	NG
TQ420 Ecostar 4.7 80 630 18.0 MaglQtouch 770 385 660 300 NG TQ420 [†] Ecostar 4.7 80 695 18.0 MaglQtouch 770 385 660 350 NG TQ425 Ecostar 4.7 100 755 23.0 MaglQtouch 770 385 660 350 NG TQ425 [†] Ecostar 4.7 100 755 23.0 MaglQtouch 770 385 660 350 NG TQ4X25 [†] Ecostar 4.7 100 810 23.0 MaglQtouch 770 385 660 350 NG TQ4X25 [†] Ecostar 4.7 122 960 28.0 MaglQtouch 880 510 660 350 NG TQ4X30 [†] Ecostar 4.7 122 1050 28.0 MaglQtouch 880 510 660 400 NG				4.9	88	695	20.0			770	385	660	350	NG
TQ4X20 [†] Ecostar 4.7 80 695 18.0 MaglQtouch 770 385 660 350 NG TQ425 Ecostar 4.7 100 755 23.0 MaglQtouch 770 385 660 350 NG TQ425 Ecostar 4.7 100 755 23.0 MaglQtouch 770 385 660 350 NG TQ4X25 [†] Ecostar 4.7 100 810 23.0 MaglQtouch 770 385 660 350 NG TQ430 Ecostar 4.7 122 960 28.0 MaglQtouch 880 510 660 350 NG TQ430 Ecostar 4.7 122 1050 28.0 MaglQtouch 880 510 660 400 NG		TQ415	Ecostar	4.7	60	475	14.0	MaglQtouch		770	385	660	300	NG
T0425 Ecostar 4.7 100 755 23.0 MaglQtouch 770 385 660 350 NG T0425 [†] Ecostar 4.7 100 810 23.0 MaglQtouch 770 385 660 350 NG T0430 Ecostar 4.7 122 960 28.0 MaglQtouch 880 510 660 350 NG T0430 Ecostar 4.7 122 960 28.0 MaglQtouch 880 510 660 350 NG T0430 [†] Ecostar 4.7 122 1050 28.0 MaglQtouch 880 510 660 400 NG		TQ420	Ecostar	4.7	80	630	18.0	MaglQtouch		770	385	660	300	NG
TQ4X25 [†] Ecostar 4.7 100 810 23.0 MaglQtouch 770 385 660 350 NG TQ430 Ecostar 4.7 122 960 28.0 MaglQtouch 880 510 660 350 NG TQ430 [†] Ecostar 4.7 122 1050 28.0 MaglQtouch 880 510 660 400 NG	star	TQ4X20 [†]	Ecostar	4.7	80	695	18.0	MaglQtouch		770	385	660	350	NG
TQ430 Ecostar 4.7 122 960 28.0 MaglQtouch 880 510 660 350 NG TQ4X30 [†] Ecostar 4.7 122 1050 28.0 MaglQtouch 880 510 660 400 NG	4	TQ425	Ecostar	4.7	100	755	23.0	MaglQtouch		770	385	660	350	NG
TQ4X30 [†] Ecostar 4.7 122 1050 28.0 MaglQtouch 880 510 660 400 NG		TQ4X25 [†]	Ecostar	4.7	100	810	23.0	MaglQtouch		770	385	660	350	NG
TQ4X30 [†] Ecostar 4.7 122 1050 28.0 MaglQtouch 880 510 660 400 NG		TQ430	Ecostar	4.7	122	960	28.0	MaglQtouch		880	510	660	350	NG
		TQ4X30 [†]	Ecostar	4.7	122	1050	28.0	MaglQtouch		880	510	660	400	NG
		TQ435	Ecostar	4.7	140	1050	32.0	MaglQtouch		880	510	660	400	NG

#Braemar TQS7 is suitable for internal installations only (in-ceiling or under-floor).

*Star rating equivalent. Based on Australian Gas Association's results calculated in accordance with the testing methodology in AS4556-2011. †Extra air models are designed to have Braemar add-on cooling system added. ‡Bracket dimensions to fit existing supply/return air plenum box for TQD315/20 and TQMD516/20 models: 770mm(W) x 395mm(D). Braemar TQD3 and TQMD5 models are suitable for external installations only. ^Bracket dimensions to fit existing supply/return air plenum box for TQD315/20 and TQMD530 models: 880mm(W) x 565mm(D).

Heater output modulation is available on Braemar TQ4/5, TQM5/6 and TQS3/4/5/6/7 series ducted gas heaters – the heat output reducing to 6% of its maximum is subject to correct heater sizing and duct/zone configuration.



Model		Series name	Stars	Gas rate	Airflow	Output	Wall control		Wall control		Length	Width	Height	Duct dia	Cootuno
	Model	Series name	Stars	(MJ/h)	@ 100 Pa (I/s)	(kW)	Standard	Option	(mm)	(mm)	(mm)	(mm)	Gas type		
	Super-Three TQS330	Supernova	3.9	122	960	28.0	MaglQtouch		880	510	660	400	NG		
	Super-Three TQS3X30 [†]	Supernova	3.9	122	1050	28.0	MaglQtouch	CLIMATE MASTERS	880	510	660	350	NG CAP		
	Super-Three TQS320	Supernova	3.9	80	630	18.0	MaglQtouch		770	385	660	300	NG		
	Super-Three TQS3X20 [†]	Supernova	3.9	80	695	18.0	MaglQtouch		770	385	660	350	NG		
	TQ315	Ecostar	3.7	60	475	14.0	Manual	MaglQtouch	770	385	660	300	NG		
3 star	TQ320	Ecostar	3.7	80	630	18.0	Manual	MaglQtouch	770	385	660	300	NG		
ິ	TQ3X20 [†]	Ecostar	3.7	80	695	18.0	Manual	MaglQtouch	770	385	660	350	NG		
	TQ325	Ecostar	3.7	100	755	23.0	Manual	MaglQtouch	770	385	660	350	NG		
	TQ3X25 [†]	Ecostar	3.7	100	810	23.0	Manual	MaglQtouch	770	385	660	350	NG		
	TQ330	Ecostar	3.7	122	960	28.0	Manual	MaglQtouch	880	510	660	350	NG		
	тqзхзо†	Ecostar	3.7	122	1050	28.0	Manual	MaglQtouch	880	510	660	400	NG		
2	TQD315 [‡]	Adaptair	3.7	60	440	14.0	Manual	MaglQtouch	770	385	635	NA	NG		
downflow	TQD320 [‡]	Adaptair	3.7	80	490	18.0	Manual	MaglQtouch	770	385	635	NA	NG		
<u>े</u> हि	TQD330 [^]	Adaptair	3.7	122	880	28.0	Manual	MaglQtouch	880	510	650	NA	NG		



Braemar specifications Add-on cooling

Invertair series#

Indoor unit	Outdoor unit	Ducted gas heater airflow I/s @ 100Pa @ Fan Speed 10	Invertair capacity Min-Nominal-Max Capacity (kW) Airflow (l/s)	Max fan speed setting	Applicable Braemar "TQ" ducted gas heaters
SACV10D1S	SCHV10D1S	695	3.20-10.00-11.00	9	TQ3X20, TQ4X20, TQM5X20
SACVIUDIS	300010013	755	330-550-650	8	TQS6X23, TQ5X23, TQM6X23
SACV12D1S	SACV12D1S SCHV12D1S	695	4.00-13.00-13.50	10	TQ3X20, TQ4X20, TQM5X20
SACVIZDIS	30HV12D13	755	415-610-800	10	TQS6X23, TQ5X23, TQM6X23
		695		10	TQ3X20, TQ4X20, TQM5X20
SACV14D1S	SCHV14D1S	755	6.00-14.50-14.50 470-700-800	10	TQS6X23, TQ5X23, TQM6X23
		810		10	TQ3X25, TQ4X25
SACV16D1S	SCHV16D1S	1070	6.40-15.50-17.00	10	TQS6X32, TQ4X30, TQ3X30
SACVIODIS SCHVIODIS	3001/10013	1070	610-1050-1070	10	TQM5X30, TQ5X32, TQM6X32

SACC series#

Indoor unit	Outdoor unit	Nominal airflow (I/s @ 100Pa)	Nominal capacity Total/Sensible (kW)	Nominal AEER	Applicable Braemar ducted gas heaters
SACC09C-S	U3009A	630	8.8 / 7.4	3.28	TQS6X23, TQM6X23, TQ5X23, TQM5X20, TQ4X20, TQ3X20
SACC11C-S	SCHF11C1S	755	10.8 / 9.6	3.34	TQ4X25, TQ3X25, TQS6X23, TQM6X23, TQ5X23
SACC15C-S	SCHF15C1S	935	14.5 / 12.7	3.47	TQS6X32, TQM6X32, TQ5X32, TQM5X30, TQ4X30, TQ3X30
SACC15C-S	SCHF15C1S	810	14.0 / 11.3^	3.40^	TQ4X25, TQ3X25
SACC18C-S	SCCF18C1S	935	16.6 / 13.5	3.38	TQS6X32, TQM6X32, TQ5X32, TQM5X30, TQ4X30, TQ3X30
SACC18C-S	SCCF18C1S	810	16.0 / 12.5^	3.30^	TQ4X25, TQ3X25
SACC18C-S	SCHF18C3S	935	17.1 / 14.0	3.19	TQS6X32, TQM6X32, TQ5X32, TQM5X30, TQ4X30, TQ3X30
SACC18C-S	SCHF18C3S	810	16.5 / 12.6^	3.15^	TQ4X25, TQ3X25
SACC21C-S	U30213A	1050	21.0 / 17.0	3.14	TQS6X32, TQM6X32, TQ5X32, TQM5X30, TQ4X30, TQ3X30
SACC21C-S	BC253A	1050	24.0 / 18.0	3.25	TQS6X32, TQM6X32, TQ5X32, TQM5X30, TQ4X30, TQ3X30







Knowledge, expertise and support

Your experienced Seeley International dealer is there to provide you with expert advice.

We're fully trained to help you choose the best climate control system to suit your family, your lifestyle and your budget.

Warranty

Every single Braemar ducted gas heating unit is made from premium grade materials and supported by a comprehensive factory-backed warranty.

Our industry standard 7 year comprehensive warranty^{**} for residential ducted gas heating also comes with a 10 year heat exchanger and Burner warranty.

While our engineering and quality control procedures mean we don't think you'll ever need to use it, our warranty is there for your protection and peace of mind.





Note: Care must be taken to ensure that the AOC coil maximum airflow is not exceeded. This can be done by setting the ducted gas heater maximum airflow during the commissioning and set up stage. Please refer to the TQ model Installation Manual. All previous XA heaters, having the appropriate airflow may also be suitable to the above Invertair and AOC models. Please consult your dealer for further clarification. ^Capacity and AEER is estimated using HPRateTM Version 5 simulation software. **The 7 year comprehensive warranty is available exclusively (i.e. only) if the product is purchased from Seeley International participating dealers. If it is not, then the warranty period, when the product is used for personal, residential household purposes, is 5 years. In commercial applications (when the product is used for keeping people warm), the warranty period is 5 years, and it is 1 year for non-domestic heating applications. The warranty has terms and conditions, including the requirement for regular servicing of the product in accordance with the owner's manual. In the fourth year the service must be performed by Seeley International or its appointed nominee.





braemar.com.au 1300 360 815









CONVOIR COOLAIR





BREEZAIR

Ducted Evaporative Cooling

BRAEMAR

Ducted Evaporative Cooling | Ducted Gas Heating Reverse Cycle Air Conditioning | Gas Wall Furnaces and Space Heaters

CLIMATE WIZARD

Indirect Evaporative Cooling

CONVAIR Portable Air Conditioning

COOLAIR

Ducted Evaporative Cooling

COOLERADO

Indirect Evaporative Cooling

AIRA

Direct and Indirect Evaporative Cooling | Ducted Gas Heating Commercial Gas Space Heating | Energy Recovery Systems



With the generous support of our Australasian dealers we are proud to be the National Variety Bash partner supporting kids in need across Australia. Seeley International Pty Ltd ABN 23 054 687 035 112 O'Sullivan Beach Road, Lonsdale, SA 5160 Phone: (08) 8328 3850 Fax: (08) 8328 3950 Email: marketing@seeleyinternational.com www.seeleyinternational.com Information in this brochure was correct at the time of preparation. E & 0E



Cat No M372 REV C (0416) CMS